

ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE
CR1207409

MODELLO
DPFTEC80

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE
CR1207409

MODELLO
DPFTEC80

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207409
DEFINITION	DPFTEC80 FRY-TOP ELLC M80 DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	250 mm
NET WEIGHT	32 Kg
VOLUME (net)	0.125
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	830 mm
PACKAGING HEIGHT	450 mm
PACKAGE VOLUME	0,310 m3
GROSS PACKING WEIGHT	42 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	10.8 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPFTEC80

ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE
CR1207409


MODELLO
DPFTEC80

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

NFT74ED	NFT76ED	NFT78ED
DPBE40..	DPBE60..	DPBE80..
DPFTEC..40	DPFTEC..60	DPFTEC..80
DI7FTE4..	DI7FTE6..	DI7FTE8..

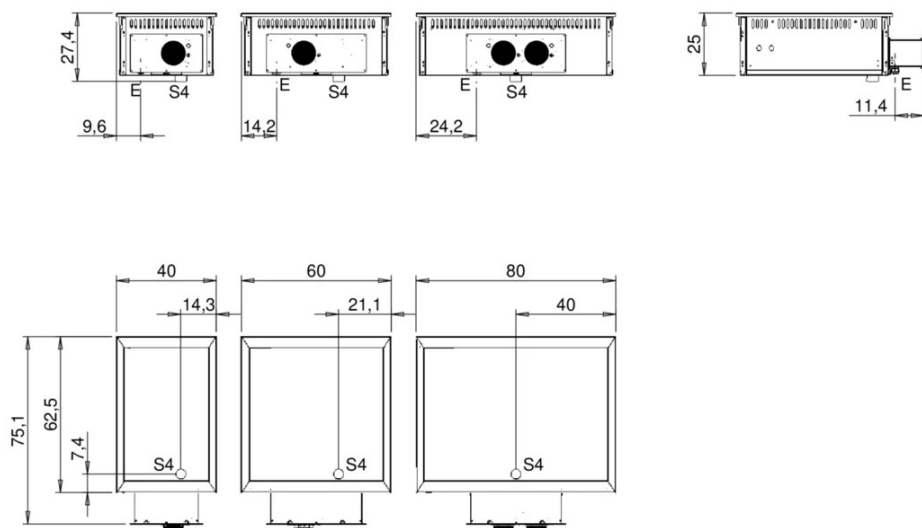

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno Ø=4.5 cm	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE
CR1207409

MODELLO
DPFTEC80

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC FRY TOP SMOOTH CHROME PLATE

CODICE
CR1207409

MODELLO
DPFTEC80

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201920	CR1201920	FRAME KIT FOR FLUSH INSTALLATION - M80
CR1201950	CR1201950	FRAME KIT FOR FREE-STANDING INSTALLATION - M80
CR0985219	70XFTP4	SPLASH GUARD FOR FRY TOP MODULE 400
CR0985229	70XFTP6	SPLASH GUARD FOR FRY TOP MODULE 600
CR0985239	70XFTP8	SPLASH GUARD FOR FRY TOP MODULE 800
CR0592060	NXFTT	PLANCHA CLEANING PLUG