

ELECTRIC FRY TOP 1/3 GROOVED CHROME PLATE

CODICE
CR1207429

MODELLO
DPFTEC1/3R80

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

ELECTRIC FRY TOP 1/3 GROOVED CHROME PLATE

CODICE
CR1207429

MODELLO
DPFTEC1/3R80

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207429
DEFINITION	DPFTEC1/3R80 FRY-TOP EL.MC M80
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	250 mm
NET WEIGHT	0 Kg
VOLUME (net)	0.125
PACKAGE LENGTH	830 mm
PACKAGE WIDTH	830 mm
PACKAGING HEIGHT	450 mm
PACKAGE VOLUME	0,272 m3
GROSS PACKING WEIGHT	30 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	10.8 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPFTEC1/3R80

ELECTRIC FRY TOP 1/3 GROOVED CHROME PLATE

CODICE
CR1207429


MODELLO
DPFTEC1/3R80

SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

NFT74ED	NFT76ED	NFT78ED
DPBE40..	DPBE60..	DPBE80..
DPFTEC..40	DPFTEC..60	DPFTEC..80
DI7FTE4..	DI7FTE6..	DI7FTE8..

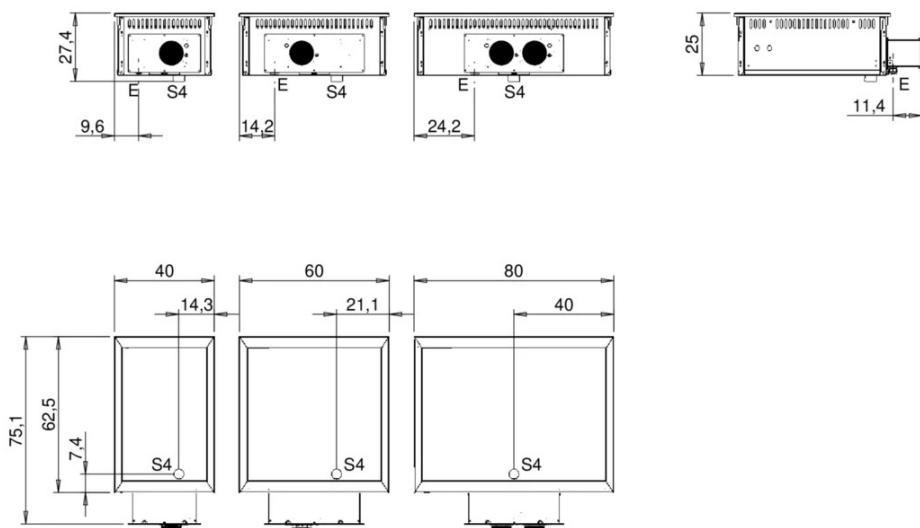

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno Ø=4.5 cm	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

ELECTRIC FRY TOP 1/3 GROOVED CHROME PLATE

CODICE
CR1207429

MODELLO
DPFTEC1/3R80

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC FRY TOP 1/3 GROOVED CHROME PLATE

CODICE
CR1207429

MODELLO
DPFTEC1/3R80

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201920	CR1201920	FRAME KIT FOR FLUSH INSTALLATION - M80
CR1201950	CR1201950	FRAME KIT FOR FREE-STANDING INSTALLATION - M80
CR0985239	70XFTP8	SPLASH GUARD FOR FRY TOP MODULE 800
CR0592060	NXFTT	PLANCHA CLEANING PLUG