

ELECTRIC PASTA COOKER 1 BOWL 28 L

CODICE
CR1207349

MODELLO
DPCPE40

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

ELECTRIC PASTA COOKER 1 BOWL 28 L

CODICE
CR1207349

MODELLO
DPCPE40

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207349
DEFINITION	DPCPE40 CUOCIPASTA EL.M40 DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	560 mm
NET WEIGHT	0 Kg
VOLUME (net)	0.14
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1060 mm
PACKAGE VOLUME	0,396 m3
GROSS PACKING WEIGHT	0 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	5.67 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPCPE40

ELECTRIC PASTA COOKER 1 BOWL 28 L

CODICE
CR1207349

MODELLO
DPCPE40


SERIE
DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

NPC74ED DPCPE40
DPDE28 DI7CPE428

NPC76ED DPCPE60
DPDE42T DI7CPE642

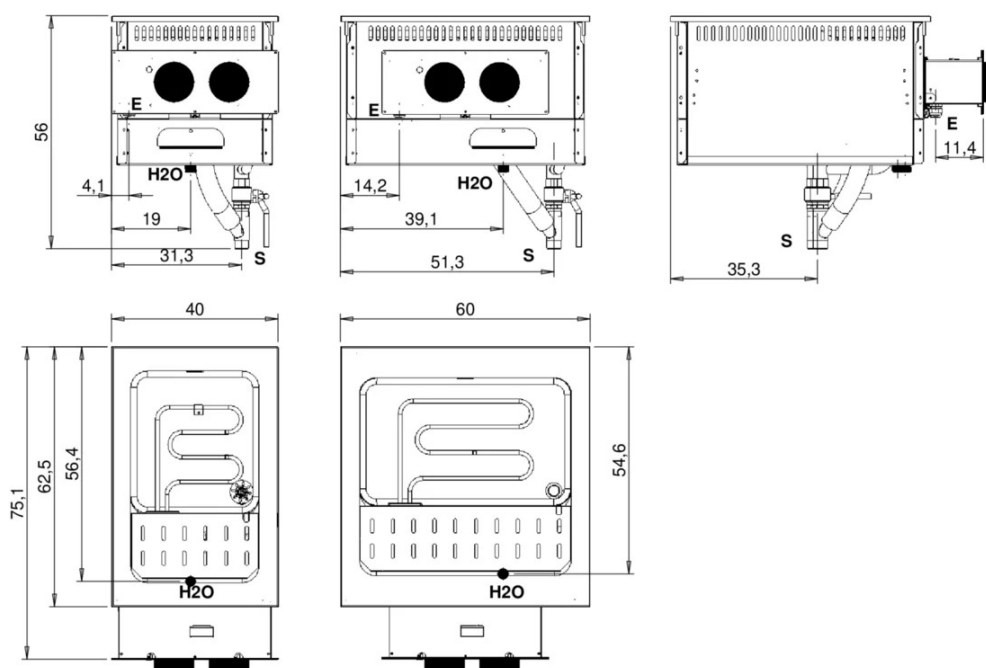

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Waterafropaansluiting - Junção descarga água EN 10226-1R1	H2O Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio EN ISO 228-1 G 3/4
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

ELECTRIC PASTA COOKER 1 BOWL 28 L

CODICE
CR1207349

MODELLO
DPCPE40

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC PASTA COOKER 1 BOWL 28 L

CODICE
CR1207349

MODELLO
DPCPE40

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201900	CR1201900	FRAME KIT FOR FLUSH INSTALLATION - M40
CR1201930	CR1201930	FRAME KIT FOR FREE-STANDING INSTALLATION - M40
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999139	GFCP26	BOTTOM TANK GRILLE 26Lt.
CR0999159	CVCP26	TANK LID 26LT
CR0999229	7KIT-A	PASTA COOKER KIT
CR0999239	7KIT-B	PASTA COOKER KIT
CR0999249	7KIT-C	PASTA COOKER KIT