

ELECTRIC PASTA COOKER 1 BASIN 42 L

CODICE
CR1207359

MODELLO
DPCPE60

SERIE
DROP-IN 7



GENERAL CHARACTERISTICS

A complete and versatile built-in range. Compatible with all types of furniture including exposed solutions, the Olis DROP-IN range makes the most of space. It also allows for a large number of customised built-in solutions.

TECHNICAL SPECIFICATIONS

ELECTRIC PASTA COOKER 1 BASIN 42 L

CODICE
CR1207359

MODELLO
DPCPE60

SERIE
DROP-IN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1207359
DEFINITION	DPCPE60 CUOCIPASTA EL.M60 DROP-IN
COMMERCIAL LINE	SERIE DROP IN
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	560 mm
NET WEIGHT	0 Kg
VOLUME (net)	0.21
PACKAGE LENGTH	640 mm
PACKAGE WIDTH	870 mm
PACKAGING HEIGHT	1100 mm
PACKAGE VOLUME	0,612 m3
GROSS PACKING WEIGHT	56 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9 kW
IP GRADE	IPX4
CERTIFIED MODEL	DPCPE60


CODICE	MODELLO	SERIE
CR1207359	DPCPE60	DROP-IN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

NPC74ED	DPCPE40
DPDE28	DI7CPE428

NPC76ED	DPCPE60
DPDE42T	DI7CPE642

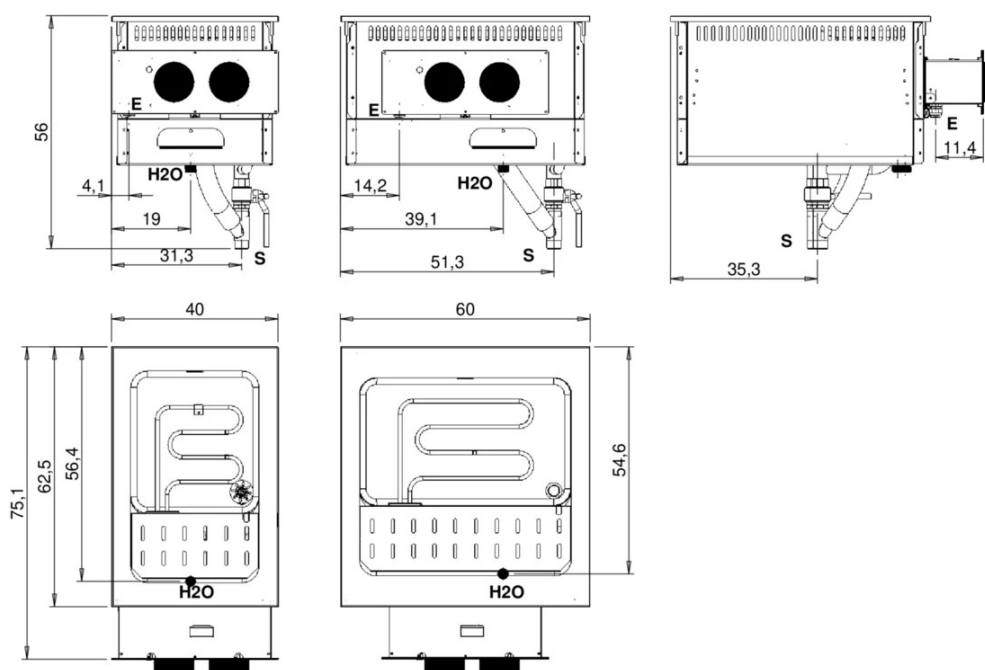

Legenda - Legende - Key - Légende - Leyenda - Leyenda - Leyenda - Leyenda	
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwattel - Entrada cable eléctrico
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1R1
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de drenó
G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
	EN ISO 228-1 G 3/4
L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

ELECTRIC PASTA COOKER 1 BASIN 42 L

CODICE
CR1207359

MODELLO
DPCPE60

SERIE
DROP-IN 7



An elegant and contemporary solution. Thanks to the special frame kit, which can be ordered as an accessory, the edge of the equipment remains flush with the worktop, creating a whole between equipment and worktop



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC PASTA COOKER 1 BASIN 42 L

CODICE
CR1207359

MODELLO
DPCPE60

SERIE
DROP-IN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1201910	CR1201910	FRAME KIT FOR FLUSH FLOOR INSTALLATION - M60
CR1201940	CR1201940	FRAME KIT FOR FREE-STANDING INSTALLATION - M60
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999139	GFCP26	BOTTOM TANK GRILLE 26Lt.
CR0999159	CVCP26	TANK LID 26LT
CR0999229	7KIT-A	PASTA COOKER KIT
CR0999239	7KIT-B	PASTA COOKER KIT
CR0999249	7KIT-C	PASTA COOKER KIT