

## 2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE  
CR0854029

MODELLO  
OV64EP

SERIE  
SERIE 650



### GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

### TECHNICAL SPECIFICATIONS

■ ELECTRIC COOKER in GLASSCERAMIC TOP version with 2 cooking zones that are marked with a circular screen print. The energy regulator allows you to set the temperature and an indicator lamp signals any residual heat on the top. The appliance is equipped with a pot presence detector device and operation indicator light. Ergonomic knobs mounted on a sloping dashboard for easy visibility.

The cooktop is stamped in one piece, AISI 304 18/10 stainless steel with Scotch Brite finish, with large radii and large capacity for overflowing liquids. ■ The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C. ■ The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.

## 2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE  
CR0854029

MODELLO  
OV64EP

SERIE  
SERIE 650

### Technical Information

| SPECIFICATION         | DATA                              |
|-----------------------|-----------------------------------|
| MATERIAL              | CR0854029                         |
| DEFINITION            | IRRAGGIAMENTO/P 2 Z.60 M40 OV64EP |
| COMMERCIAL LINE       | SERIE 600                         |
| SUPPLY                | ELECTRICS                         |
| DIM. WIDTH            | 400 mm                            |
| DIM. PRODUCTIVITY     | 600 mm                            |
| DIM. HEIGHT           | 295 mm                            |
| NET WEIGHT            | 15.4 Kg                           |
| VOLUME (net)          | 0.071                             |
| PACKAGE LENGTH        | 430 mm                            |
| PACKAGE WIDTH         | 630 mm                            |
| PACKAGING HEIGHT      | 390 mm                            |
| PACKAGE VOLUME        | 0,106 m3                          |
| GROSS PACKING WEIGHT  | 20 Kg                             |
| STANDARD POWER SUPPLY | 380-415V 3N                       |
| FREQUENCY             | 50-60 Hz                          |
| ELECTRICAL POWER      | 5 kW                              |
| IP GRADE              | IPX4                              |
| CERTIFIED MODEL       | OV64EP                            |

# 2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION


CODICE  
CR0854029

MODELLO  
OV64EP

SERIE  
SERIE 650

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

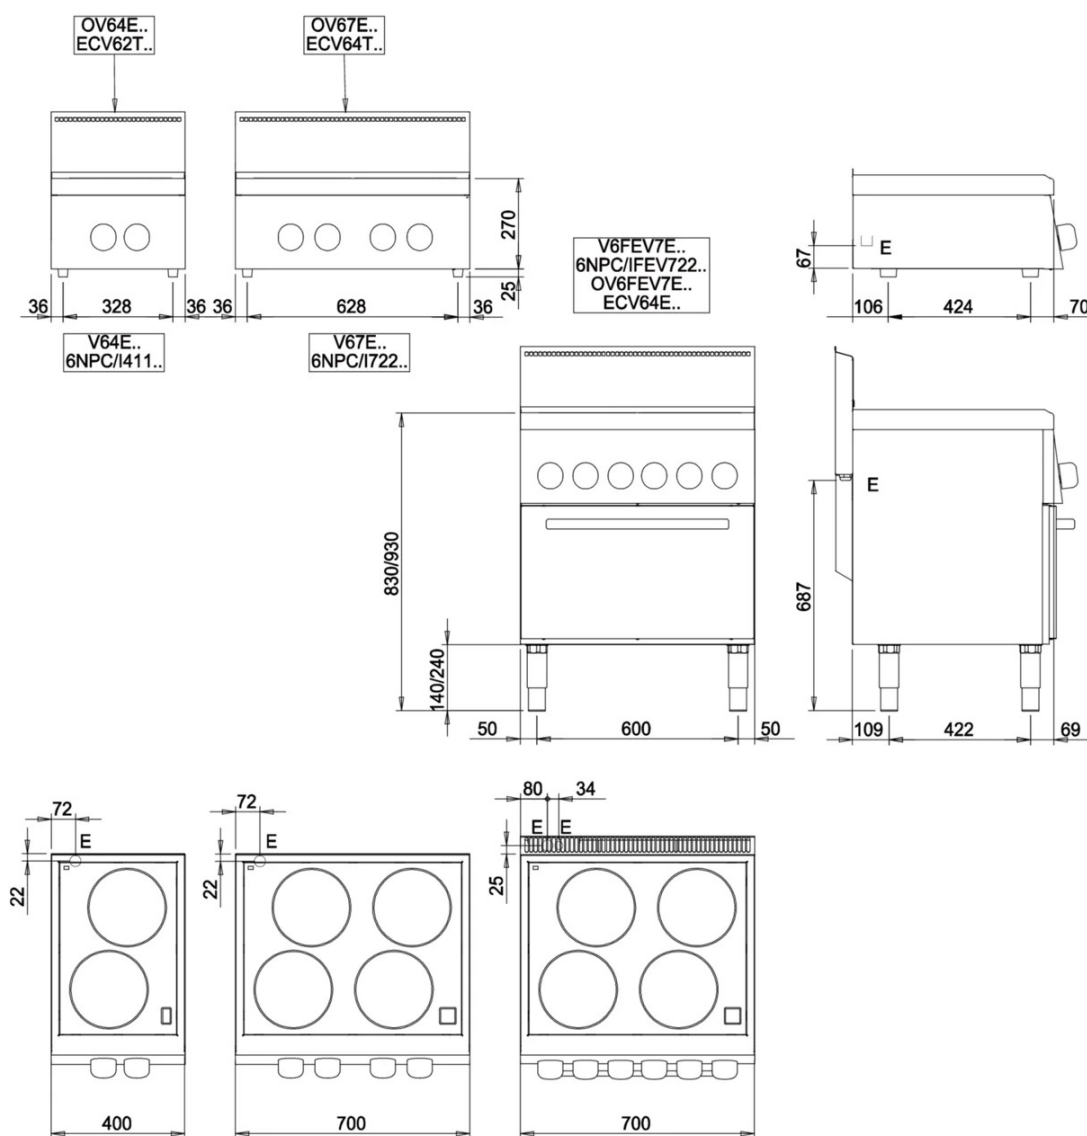

## LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

**E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupe de cable el Pisacable - Elektrische kabelwattel

## 2-ZONE ELECTRIC GLASS-CERAMIC COOKER - TOP VERSION

CODICE  
CR0854029

MODELLO  
OV64EP

SERIE  
SERIE 650



The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C.



The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.