

CR0854039

MODELLO OV67E **SERIE**SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ ELECTRIC COOKER in GLASSCERAMIC TOP version with 4 cooking zones that are marked with a circular silk-screen printing. The energy regulator allows you to set the temperature and an indicator lamp signals any residual heat on the top. The appliance is equipped with a pot presence detector device and operation indicator light. Ergonomic knobs mounted on a sloping dashboard for easy visibility.

The cooktop is stamped in one piece, AISI 304 18/10 stainless steel with Scotch Brite finish, with large radii and large capacity for overflowing liquids. • The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C. • The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.





CODICE CR0854039 **MODELLO** OV67E **SERIE** SERIE 650

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0854039
DEFINITION	IRRAGGIAMENTO 4 Z.60 M70 OV67E
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	700 mm
DIM. PRODUCTIVITY	600 mm
DIM. HEIGHT	295 mm
NETWEIGHT	13.7 Kg
VOLUME (net)	0.124
PACKAGE LENGTH	750 mm
PACKAGE WIDTH	750 mm
PACKAGING HEIGHT	250 mm
PACKAGE VOLUME	0,141 m3
GROSS PACKING WEIGHT	21 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	8 kW
IP GRADE	IPX4
CERTIFIED MODEL	OV67E






CODICE CR0854039 MODELLO OV67E **SERIE** SERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

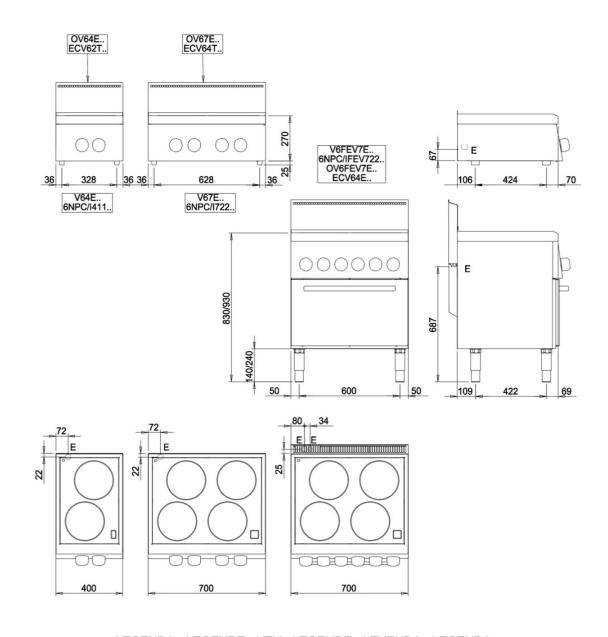

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel







CODICEMODELLOSERIECR0854039OV67ESERIE 650



The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C.



The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.



