ELECTRIC GLASS-CERAMIC COOKER 4 ZONES ON



CODICE

CR0854069

MODELLO SERIE
OV6FEV7EP SERIE 650





GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ ELECTRIC COOKER in GLASSCERAMIC Version with OVEN, with 4 cooking zones that are marked with a circular silk-screen printing. The energy regulator allows you to set the temperature and an indicator lamp signals any residual heat on the top. The appliance is equipped with a pot presence detector device and operation indicator light. Ergonomic knobs mounted on a sloping dashboard for easy visibility. The cooktop is stamped in one piece, AISI 304

18/10 stainless steel with Scotch Brite finish, with large radii and large capacity for collecting overflowing liquids. Static or ventilated GN 1/1 electric oven with adjustable temperature from 110-280°C. ■ The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C. ■ The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.



ELECTRIC GLASS-CERAMIC COOKER 4 ZONES ON OVEN



CODICE CR0854069

MODELLO OV6FEV7EP **SERIE** SERIE 650

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0854069
DEFINITION	IRRAGGIAM.4 Z./P F.EL/V.60 M70 OV6FEV7EP
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	700 mm
DIM. PRODUCTIVITY	650 mm
DIM. HEIGHT	870 mm
NETWEIGHT	71 Kg
VOLUME (net)	0.396
PACKAGE LENGTH	750 mm
PACKAGE WIDTH	770 mm
PACKAGING HEIGHT	1340 mm
PACKAGE VOLUME	0,774 m3
GROSS PACKING WEIGHT	81 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	14.2 kW
IP GRADE	IPX3
CERTIFIED MODEL	OV6FEV7EP



ELECTRIC GLASS-CERAMIC COOKER 4 ZONES ON






CODICE CR0854069 **MODELLO** OV6FEV7EP **SERIE** SERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

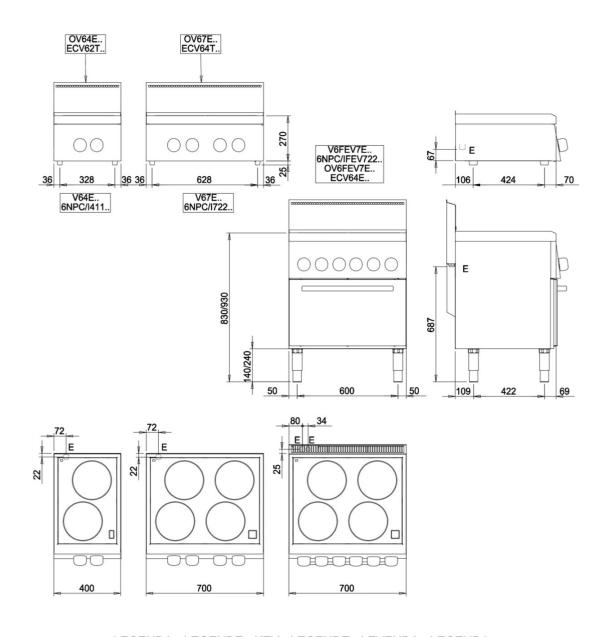

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel





1

ELECTRIC GLASS-CERAMIC COOKER 4 ZONES ON OVEN



CODICE CR0854069 **MODELLO** OV6FEV7EP SERIE 650



The electric oven of GN 1/1 dimensions is equipped with armoured heating elements on the top and bottom with independent regulation and adjustable thermostat from 110 to 280°C.



The glass-ceramic cookers are available in two versions: standard with a total output of 16.4 kW and enhanced with 18.4 kW in total.

