ELECTRIC INDUCTION COOKER 1 ZONE - TOP VERSION



CODICE CR0854079 MODELLO OI64E **SERIE** SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ ELECTRIC INDUCTION COOKER TOP version with 1 zone for an output of 5kW per zone. The appliance is equipped with pot presence detector and operation indicator light. Ergonomic knobs mounted on a sloping dashboard for easy visibility. The cooktop is stamped in one piece, AISI 304 18/10 stainless steel with Scotch

Brite finish, with large radii and large capacity for collecting overflowing liquids. If The cooking zones are marked with a circular silkscreen printing with a diameter of 22 cm (30 cm for the wok), for a power of 5 kW per zone. If A device detects the presence of the pan and activates the heating; in the event of abnormal use, however, a special overheating protection device blocks the operation.



ELECTRIC INDUCTION COOKER 1 ZONE - TOP VERSION



CODICE CR0854079 MODELLO OI64E SERIE 650

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0854079
DEFINITION	INDUZIONE 1 ZONA 60 M40 OI64E
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	650 mm
DIM. HEIGHT	295 mm
NETWEIGHT	24 Kg
VOLUME (net)	0.077
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	780 mm
PACKAGING HEIGHT	670 mm
PACKAGE VOLUME	0,231 m3
GROSS PACKING WEIGHT	31.2 Kg
STANDARD POWER SUPPLY	400V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	5 kW
IP GRADE	IPX3
CERTIFIED MODEL	OI64E



ELECTRIC INDUCTION COOKER 1 ZONE - TOP







 CODICE
 MODELLO
 SERIE

 CR0854079
 OI64E
 SERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

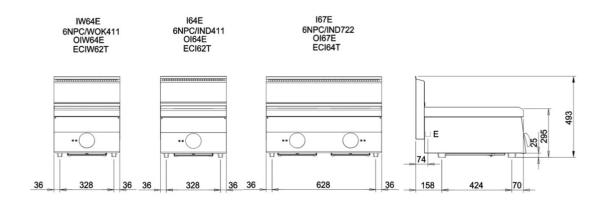

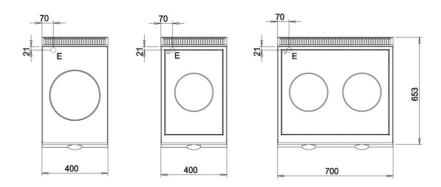

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel





ELECTRIC INDUCTION COOKER 1 ZONE - TOP VERSION



CODICEMODELLOSERIECR0854079OI64ESERIE 650



The cooking zones are marked with a circular silkscreen printing with a diameter of 22 cm (30 cm for the wok), for a power of 5 kW per zone.



A device detects the presence of the pan and activates the heating; in the event of abnormal use, however, a special overheating protection device blocks the operation.



