2-ZONE ELECTRIC INDUCTION COOKER - TOP VERSION



CR0854089

MODELLO OI67E SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ ELECTRIC INDUCTION COOKER TOP version with 2 zones for an output of 5kW per zone. The appliance is equipped with pot presence detector and operation indicator light. Ergonomic knobs mounted on a sloping dashboard for easy visibility. The cooktop is stamped in one piece, AISI 304 18/10 stainless steel with Scotch

Brite finish, with large radii and large capacity for collecting overflowing liquids. If The cooking zones are marked with a circular silkscreen printing with a diameter of 22 cm (30 cm for the wok), for a power of 5 kW per zone. If A device detects the presence of the pan and activates the heating; in the event of abnormal use, however, a special overheating protection device blocks the operation.



2-ZONE ELECTRIC INDUCTION COOKER - TOP VERSION



CODICE CR0854089 **MODELLO** OI67E **SERIE** SERIE 650

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0854089
DEFINITION	INDUZIONE 2 ZONE 60 M70 OI67E
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	700 mm
DIM. PRODUCTIVITY	650 mm
DIM. HEIGHT	295 mm
NETWEIGHT	42 Kg
VOLUME (net)	0.134
PACKAGE LENGTH	650 mm
PACKAGE WIDTH	650 mm
PACKAGING HEIGHT	250 mm
PACKAGE VOLUME	0,106 m3
GROSS PACKING WEIGHT	52 Kg
STANDARD POWER SUPPLY	400V 3N
FREQUENCY	50/60 Hz
ELECTRICAL POWER	10 kW
IP GRADE	IPX3
CERTIFIED MODEL	Ol67E



2-ZONE ELECTRIC INDUCTION COOKER - TOP


VERSION




CODICEMODELLOSERIECR0854089OI67ESERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

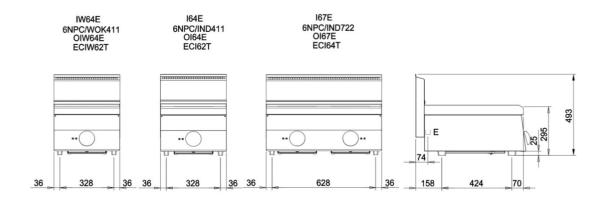

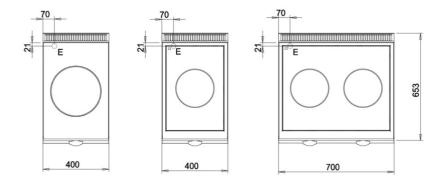

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel





2-ZONE ELECTRIC INDUCTION COOKER - TOP VERSION



CODICEMODELLOSERIECR0854089OI67ESERIE 650



The cooking zones are marked with a circular silkscreen printing with a diameter of 22 cm (30 cm for the wok), for a power of 5 kW per zone.



A device detects the presence of the pan and activates the heating; in the event of abnormal use, however, a special overheating protection device blocks the operation.

