**CODICE** CR0854299 MODELLO OF66G8 **SERIE** SERIE 650





### **GENERAL CHARACTERISTICS**

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

#### **TECHNICAL SPECIFICATIONS**

■ GAS FRIGGER Liters 8+8 Fryers have high specific powers to ensure a 'high quality of the fried product, as it reduces the amount of oil absorbed. The provided specific powers of 1 kW/l are characteristic of large professional machines. Sensitivity of thermostat with bulb located in the center of the tank, ensures maximum temperature control with fast response time to temperature drops. Piezoelectric ignition, pilot flame and valve with thermocouple to ensure maximum safety. Adjustable temperature from 60 to 190°C. In the gas fryer, the burner is external to the tank and is made of stainless steel with a stabilised flame. Piezo ignition and safety ensured by valve with thermocouple and pilot flame. The fryers have moulded tubs with sloping bottoms to facilitate oil drainage.



CLIS Weinnovate cooking

**CODICE** CR0854299 MODELLO OF66G8 **SERIE** SERIE 650

### **Technical Information**


SPECIFICATION	DATA
MATERIAL	CR0854299
DEFINITION	FRIGGITRICE G.2x8L 60 M60 OF66G8
COMMERCIAL LINE	SERIE 600
SUPPLY	GAS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	650 mm
DIM. HEIGHT	295 mm
NETWEIGHT	41 Kg
VOLUME (net)	0.115
PACKAGE LENGTH	640 mm
PACKAGE WIDTH	780 mm
PACKAGING HEIGHT	680 mm
PACKAGE VOLUME	0,340 m3
GROSS PACKING WEIGHT	49 Kg
GAS POWER	14
GAS POWER (G25.3/25mbar)	13,30
CERTIFIED MODEL	OF66G8



**CODICE** CR0854299 MODELLO OF66G8 **SERIE** SERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

### MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

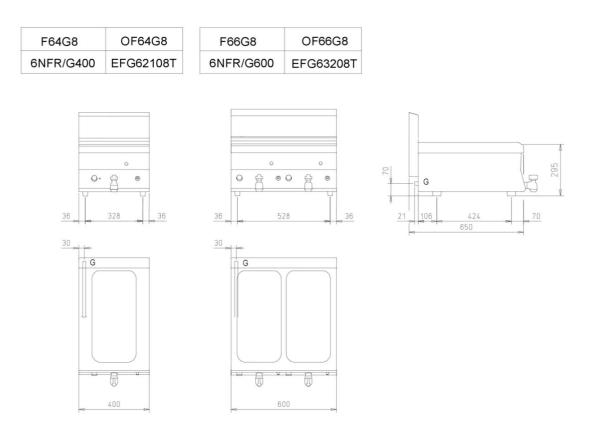

Legenda - Legende - Key - Legende - Leyenda - Legenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection Arriveè gaz - Union da gas - Gasaansluiting -EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)





**CODICE** CR0854299 MODELLO OF66G8 **SERIE** SERIE 650





In the gas fryer, the burner is external to the tank and is made of stainless steel with a stabilised flame. Piezo ignition and safety ensured by valve with thermocouple and pilot flame.



The fryers have moulded tubs with sloping bottoms to facilitate oil drainage.





CODICE	MODELLO	SERIE
CR0854299	OF66G8	SERIE 650

#### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA10405096900	OC-1M	Basket for tub 8 Lt 1pcs 20x28x11,5 cm
MA10405097900	OC-1/2M	OFQG fryer basket 1/2 module 10x28x11,5

