

CR0854309

MODELLO OF64ER **SERIE** SERIE 650



GENERAL CHARACTERISTICS

The OLIS SNACK 650 range has a design that characterises all equipment in both top and monoblock versions, with large knobs and an ergonomic dashboard shape.

The wide choice of machines and high performance make this range the ideal choice for environments that are not very spacious but still require high-performance machines.

The modularity of the range allows infinite combinations with installation on compartment bases or tables.

TECHNICAL SPECIFICATIONS

■ ELECTRIC FRYER Liters 10 Version with tilting heating element. Fryers have high specific powers to ensure a 'high quality of the fried product, as it reduces the amount of oil absorbed. The provided specific powers of 0.9 kW/l, are characteristic of large professional machines. The sensitivity of the thermostat with bulb positioned in the center of the tank, ensures maximum temperature control with fast response time to temperature drops. Temperature control, safety

thermostat, power indicator lights and fully removable heating elements to allow easy cleaning. Temperature adjustable from 100 to 190°C. In the gas fryer, the burner is external to the tank and is made of stainless steel with a stabilised flame. Piezo ignition and safety ensured by valve with thermocouple and pilot flame. The fryers have moulded tubs with sloping bottoms to facilitate oil drainage. In the electric version, the heating elements are completely removable from the tank for optimal cleaning.





CODICE CR0854309 **MODELLO** OF64ER SERIE 650

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0854309
DEFINITION	FRIGGITRICE R/ROV.EL.10L 60 M40 OF64ER
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	600 mm
DIM. HEIGHT	295 mm
NETWEIGHT	19 Kg
VOLUME (net)	0.071
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	780 mm
PACKAGING HEIGHT	670 mm
PACKAGE VOLUME	0,231 m3
GROSS PACKING WEIGHT	25 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	6 kW
IP GRADE	IPX3
CERTIFIED MODEL	OF64ER






CODICEMODELLOSERIECR0854309OF64ERSERIE 650

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALLACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

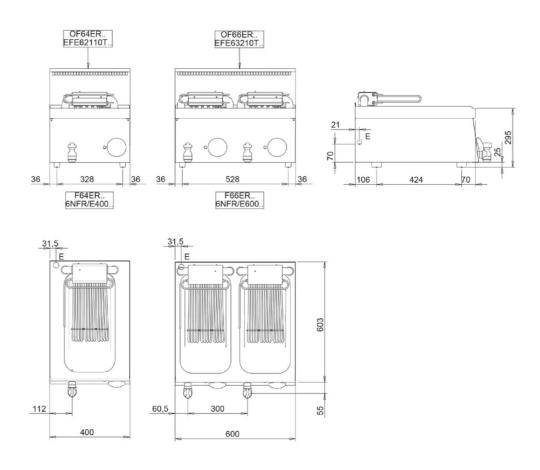

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel





2



CODICEMODELLOSERIECR0854309OF64ERSERIE 650



In the gas fryer, the burner is external to the tank and is made of stainless steel with a stabilised flame. Piezo ignition and safety ensured by valve with thermocouple and pilot flame.



The fryers have moulded tubs with sloping bottoms to facilitate oil drainage.



In the electric version, the heating elements are completely removable from the tank for optimal cleaning.







CODICEMODELLOSERIECR0854309OF64ERSERIE 650

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0852849	OBV64	OPEN BASE size 40cm Series 650
CR0858009	OCS40	2 drawers with plastic tray GN1/1 H15cm
MA10405246900	ONC-1/2M	OFQE fryer basket 1/2 module 8.5x30x10.5
CR0858029	OP40D/S	door for 40 -80 compartment
MA10405230900	ONC-1M	Basket for tub 10 lt TOP17,5x30x10,5 cm ONLY TOP VERSION

