

CODICE

MODELLO

SERIE

CR1139529T4W DT94/10KBEIM-T4W DIAMANTE 4.0



GENERAL CHARACTERISTICS

Diamond 90 Touch 4.0 - Everything under control Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display. Tradition and innovation, everything on your worktop A new non-slip square and rounded knob design for a more ergonomic grip and an embossed indicator that makes it easier to select the datum to be set. And with the exclusive Encoder Functionality, simply touch the parameter you want, turn the knob to adjust the level and press it to start the set datum. With water- and dirt-proof crown. Quick and precise parameter selection. Easy and clear temperature management. Special functions always visible and accessible from the display. Stainless steel outer shells and feet. Height from worktop adjustable from 840 to

900 mm. Tops with 2 mm thickness All model-identified equipment (T4W) is 4.0 Ready equipment, allowing you to benefit from all the advantages of connecting your equipment to a cloud system.

TECHNICAL SPECIFICATIONS

- Available with iron and stainless steel tanks. Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Water loading via solenoid valve.

 Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. ■ Manual or motorised lifting. ■ Heating via armoured incoloy heating elements.
- Stainless steel cooking vessel, 10 mm thick. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. Heating via armoured incoloy heating elements. ■ Industry 4.0 ready version. ■ Possibility of setting 2 timers to control cooking. ■ An acoustic signal alerts the operator at the end of the set time.

Temperature control via touch screen and adjustment with ergonomic knob ■ Predisposition for core probe, for even greater cooking control. ■ Reaching the set core temperature is signalled by an acoustic signal. ■ Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss. ■ Quick and precise parameter selection. ■ Easy and clear temperature management. ■ Special functions always visible and accessible from the display. ■ Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.





CODICE

MODELLO

SERIE

CR1139529T4W

DT94/10KBEIM-T4W

DIAMANTE 4.0

Technical Information

| SPECIFICATION | DATA |
|-----------------------|--|
| MATERIAL | CR1139529T4W |
| DEFINITION | DT94/10 KBEIM-T4W BR.80 INOX MOT.ELETTR. |
| COMMERCIAL LINE | DIAMANTE TOUCH |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 870 mm |
| NETWEIGHT | 200 Kg |
| VOLUME (net) | 0.626 |
| PACKAGE LENGTH | 850 mm |
| PACKAGE WIDTH | 1020 mm |
| PACKAGING HEIGHT | 1050 mm |
| PACKAGE VOLUME | 1,300 m3 |
| GROSS PACKING WEIGHT | 211 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| FREQUENCY | 50-60 Hz |
| ELECTRICAL POWER | 9 kW |
| IP GRADE | IPX5 |
| CERTIFIED MODEL | DT94/10 KBEIM |





CODICE

MODELLO

SERIE


CR1139529T4W

DT94/10KBEIM-T4W

DIAMANTE 4.0


SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALLACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

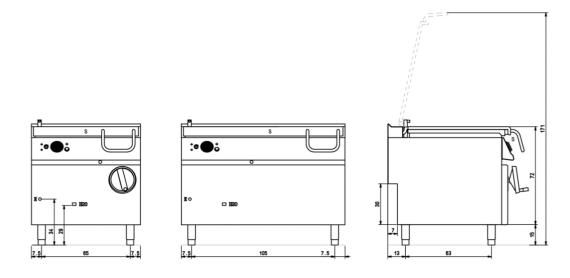







Legenda - Legende - Key - Légende - Leyenda - Legenda

H2O Attacco arrivo acqua - Wasseranschluss - Water inlet Arrivée eau - Union de agua - Wateraansluiting EN ISO 228-1 G 3/4

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac - Descarga cuba - Water toevoer







CODICE

CR1139529T4W

MODELLO
DT94/10KBEIM-T4W

SERIE

DIAMANTE 4.0



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.



Temperature control via touch screen and adjustment with ergonomic knob



Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display.



Everything is under control, perfect results every time. Thanks to the practical display, parameter selection is quick and precise. Easy and clear temperature management, and special functions are always visible and accessible from the display.



Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Self-balancing lids.







CODICE

MODELLO

SERIE

CR1139529T4W

DT94/10KBEIM-T4W

DIAMANTE 4.0

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|-----------|-------------|----------------------------|
| CR1357499 | 4.0IOTPRO | PRO Subscription - Cloud |
| CR1357479 | 4.0IOTENTRY | ENTRY Subscription - Cloud |
| CR1166970 | KS-T | Heart probe |

