

CODICE CR1650889

MODELLO
D72/10SFTE

SERIE
DIAMANTE 70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.

Scotch Brite finish stainless steel outer shells and feet.

Worktop height adjustable from 840 to 900 mm.

Modularity of range: 200-400-600-800-1200

Wide range of accessories.

TECHNICAL SPECIFICATIONS

- 15 mm thick cooking plate totally independent of the hob. Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer. Large grease collection drawer. Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. Plate not welded to the machine bed with optimisation of structural points under thermal stress Stainless steel overflow plug, supplied as an accessory, for channel flooding management Plate not welded to the machine bed with optimisation of structural points under thermal stress New version with identical cooking surface area and reduced energy output. An increase in output per cm2 allows a reduction in consumption of up to 15% compared to conventional versions Tubular burner with self-stabilising flame with great uniformity of heat distribution.
- Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food Large fat collection drawer with capacity of the entire volume of the perimeter channel Grooved plate design ensures cleanliness right to the end of the plate Plate not welded to the machine bed with optimisation of structural points under thermal stress Plate not welded to the machine bed with optimisation of structural points under thermal stress Thermal cutting that facilitates the user and adjacent machinery. Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen. Water dispenser kit available as an accessory





CODICE CR1650889 **MODELLO**D72/10SFTE

SERIE
DIAMANTE 70

Technical Information

SPECIFICATION	DATA
SPECIFICATION	DATA
MATERIAL	CR1650889
DEFINITION	D72/10SFTE FTE LISCIO M40 A/G
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NETWEIGHT	51 Kg
VOLUME (net)	0.254
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1160 mm
PACKAGE VOLUME	0,435 m3
GROSS PACKING WEIGHT	58.2 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	3.6 kW
IP GRADE	IPX5
CERTIFIED MODEL	D72/10SFTE



FRY TOP S Electric M40 Iron Plate - Smooth - On








CODICE CR1650889 **MODELLO**D72/10SFTE

SERIE
DIAMANTE 70

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

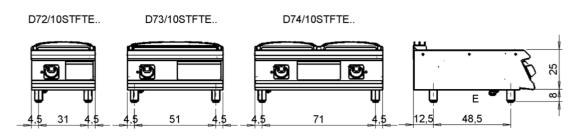

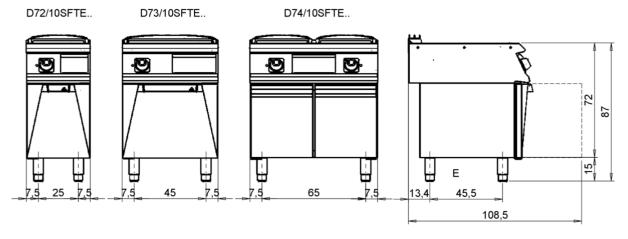

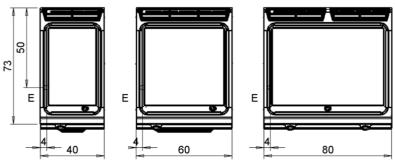

	40 80		▶				
	Legenda - Legende - Key - Légende - Leyenda - Legenda						
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás				
s	l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água					
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = A2 =	, ,				
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão						
S3	3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jack water drain Evacuation eau double envelope - Descarga de agua						
	intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível				
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno						







CR1650889

MODELLOD72/10SFTE

DIAMANTE 70

SERIE



Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food



Plate not welded to the machine bed with optimisation of structural points under thermal stress




Large fat collection drawer with capacity of the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Plate not welded to the machine bed with optimisation of structural points under thermal stress



Water dispenser kit available as an accessory





CODICE CR1650889 **MODELLO**D72/10SFTE

SERIEDIAMANTE 70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658619	97CPFT4	M40 fry top cleaning drawer
CR1658609	97TFT	Plancha cleaning cap
CR1354999	PKLR	Replacement blades (10PCS)
CR1658639	7AFT4	M40 splash guard
CR1659229	PAFT4	SUPER FRY TOP ACCESSORY HOLDER
CR1659359	AKBFT-1	KIT 3 BOWLS GN1/9 H65 MM
CR1659369	AKBFT-2	KIT 2 BOWLS GN1/6 H65 MM
CR1659379	AKBFT-3	KIT 1 BASIN GN1/3 H65 MM
CR1659259	AGMFT48	HOLDING GRID FOR FRY TOP
CR1658699	D794CAFT	WATER LOADING FOR FRY TOP M40 - D70 D90 - GAS OR ELECTRIC
CR1658719	D74EKSCFT	CONTINUOUS EXHAUST FOR FRY TOP M40 - D70 - ELECTRIC
CR1658749	D74ECSCFT	CONTINUOUS LOAD + SCAR.FOR FRY TOP M40 - D70 - ELECTRIC

